

# Ecosine Max, 480 VAC 50 Hz Full Performance Passive Harmonic Filters



- Demonstrate best cost-performance ratio
- Achieve 5% THDi for diode rectifier without DC-link choke and thyristor rectifier
- Best-in-class partial load performance
- Most compact open panel design for cabinet integration
- Reliable and robust
- Plug and play, ready to use



## Approvals & Compliances



## Features and Benefits

Schaffner ecosine harmonic filters represent an economical solution to the challenge of load-applied harmonics mitigation in three-phase power systems. With a plug-and-play approach and more compact dimensions than comparable products, they can be quickly installed and easily commissioned. They increase the reliability and service life of electric installations, help utilize electric system capacity better, and are the key to meet Power Quality standards such as IEEE 519. Ecosine filters reshape your distorted current back to the desired sinusoidal waveform. Schaffner ecosine filters can be applied to virtually any kind of power electronics with front-end six-pulse rectifiers, 3-phase diode or thyristor bridges, where harmonic current distortion needs to be reduced to defined limits.

## Typical Applications


- Equipment with front-end six-pulse rectifier
- Motor drives
- Factory automation equipment
- Water/wastewater treatment facilities
- Fan and pump applications
- HVAC installations
- Mission-critical processes
- DC fast chargers

## Technical Specifications

<b>Nominal operating voltage</b>	3 x 440 VAC to 480 VAC ±10%
<b>Operating frequency</b>	50 Hz ±1 Hz
<b>Nominal motor drive input power rating</b>	315 to 560 kW
<b>Total harmonic current distortion THDi*</b>	<5% @ rated power for drives without Ldc ~3.5% @ rated power for drives equipped with 4% Ldc
<b>Total demand distortion TDD</b>	According to IEEE 519
<b>Efficiency</b>	>99% for rated voltage and power
<b>Overload capability</b>	1.6x rated current for 1 minute, once per hour
<b>SCCR**</b>	100 kA (UL approved)
<b>High potential test voltage</b>	P -> E 2520 VAC (1s)
<b>Oversvoltage category</b>	OV III (IEC 60664-1)
<b>Earthing System</b>	TN, TT, IT
<b>Protection category</b>	IP 00
<b>Cooling</b>	External cooling***
<b>Ambient temperature range</b>	-25°C to +40°C fully operational +40°C to +70°C derated operation**** -25°C to +85°C transport and storage
<b>Design corresponding to</b>	Filter: UL 61800-5-1, EN 61800-5-1 Chokes: EN 60076-6
<b>Flammability corresponding to</b>	UL 94 V-2
<b>MTBF @ 40°C/480 V (Mil-HB-217F)</b>	>200'000 hours

\* System requirements: THDv <2%, line voltage unbalance <1%  
Note: performance specifications in this brochure refer to six-pulse diode rectifiers. SCR rectifier front-ends will produce different results, dependent upon the firing angle of the thyristors.  
\*\* External UL-rated fuses required. Please consult the user manual.  
\*\*\* Please check the inlet air flow required for cooling table further in this document and the user manual.  
\*\*\*\* Iderated = Inominal\*SQRT((Tmax-Tamb)/(Tmax-Tnominal)) = Inominal\*SQRT((70°C-Tamb)/30°C)

## Typical electrical schematic

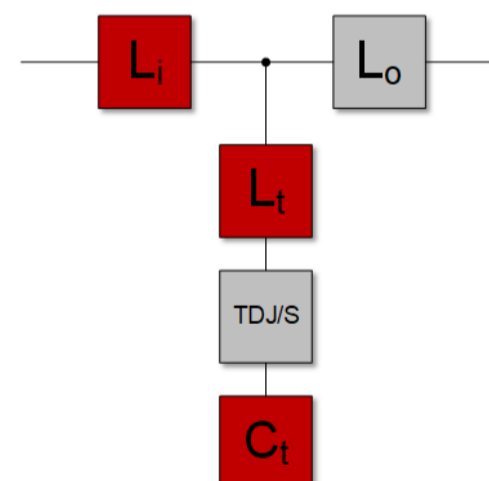

## Filter Selection Table With Circuit Breaker Module

Filter	Rated load power @ 480 V/50 Hz [kW]	Motor drive input current* [Arms]	Rated filter input current [Arms]	Typical power losses @ 40°C [W]	Circuit breaker rated current [A]	Weight [kg]	Terminal	Frame size
FN 3480-315-99-E0XXSXX	315	565	393	3278	250	270	Busbar	S10
FN 3480-355-99-E0XXSXX	355	630	442	3343	250	328	Busbar	S10
FN 3480-400-99-E0XXSXX	400	701	499	3584	300	366	Busbar	S12
FN 3480-500-99-E0XXSXX	500	856	629	4356	400	385	Busbar	L10
FN 3480-560-99-E0XXSXX	560	947	705	4536	400	410	Busbar	L12

\* Motor drive input current without harmonic filter.

## Filter Selection Table With Trap Disconnect Jumper


Filter	Rated load power @ 480 V/50 Hz [kW]	Motor drive input current* [Arms]	Rated filter input current [Arms]	Typical power losses @ 40°C [W]	Weight [kg]	Terminal	Frame size
FN 3480-315-99-E0XXJXX	315	565	394	3278	270	Busbar	S10
FN 3480-355-99-E0XXJXX	355	630	442	3343	328	Busbar	S10
FN 3480-400-99-E0XXJXX	400	701	499	3584	366	Busbar	S12
FN 3480-500-99-E0XXJXX	500	856	629	4356	385	Busbar	L10
FN 3480-560-99-E0XXJXX	560	947	705	4536	410	Busbar	L12

\* Motor drive input current without harmonic filter.

## Earth Terminals


Earth (PE)	Screw thread	Screw torque [Nm]
S08-L12	M12	20-25

## Frame Size Designation

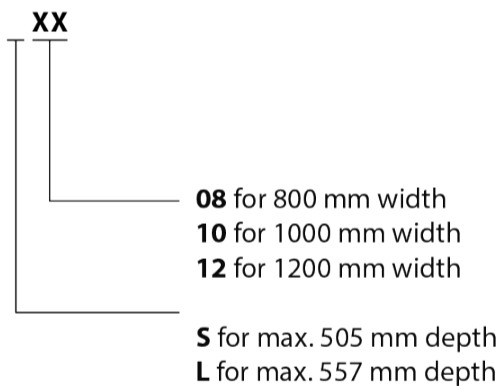

Product selector



FN 34nn-xxx-yyy-

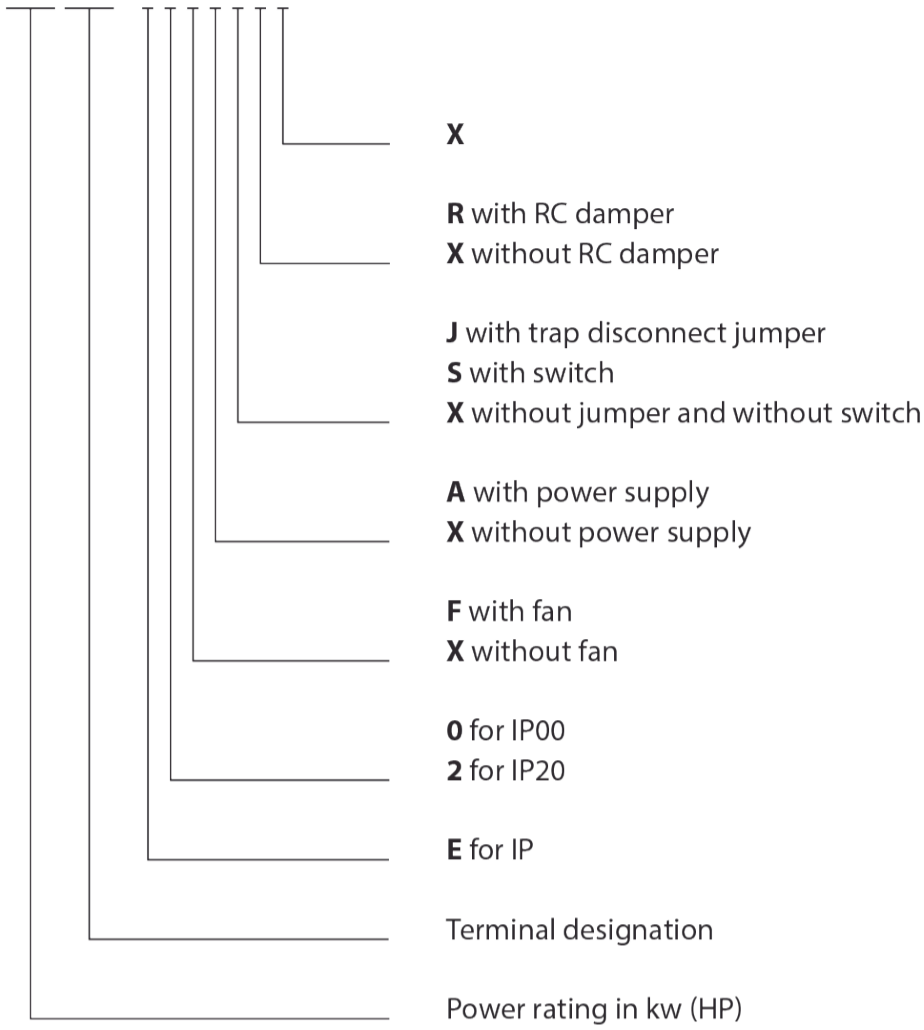

Filter Configurations

E0XXSXX

E0XXJXX




- For rectifiers without DC-link choke

- Filters contain trap disconnect switch

- For rectifiers without DC-link choke

- Filters contain trap disconnect jumper

## Mechanical Data Of IP 00 Enclosure

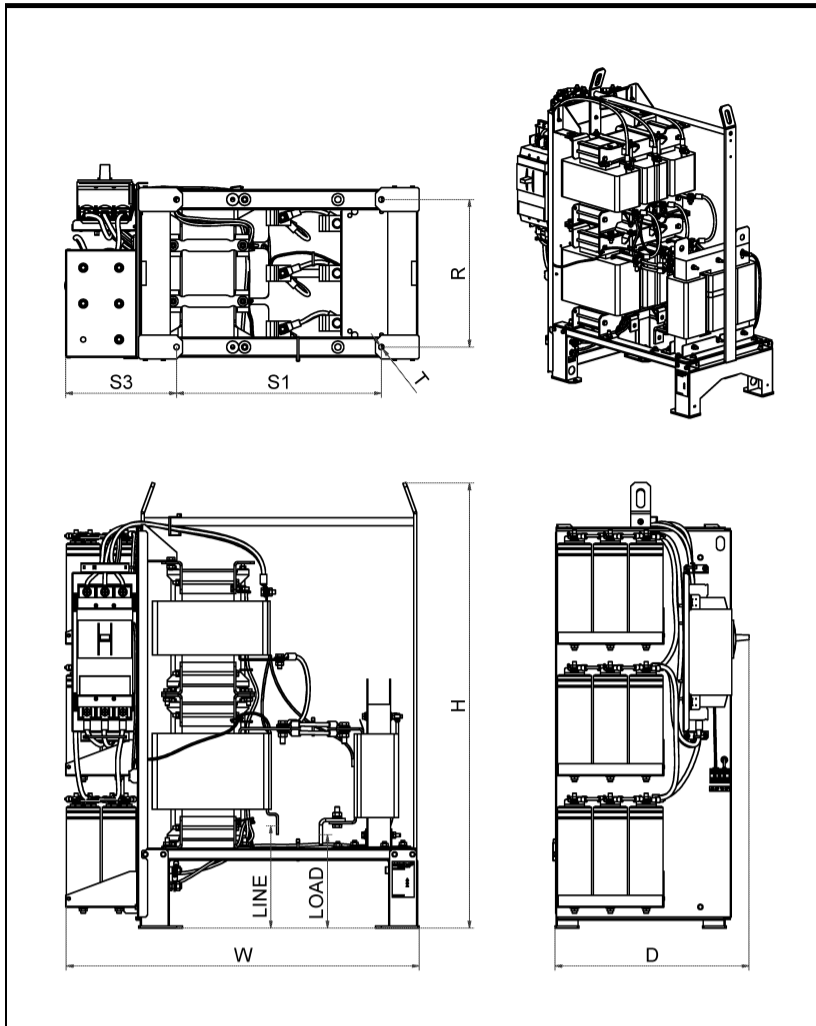

## Dimensions

Frame size*	W	D	H	R	S1	S2	S3	T	LINE	LOAD	Recommended cabinet size WxDxH
<b>S08</b>	max. 650	max. 505	1120	380	330	230	490	13.5	255 ± 10	470 ± 30	800x600x2000
<b>S10</b>	890	max. 505	1120	370	514	n/a	280	13.5	255 ± 10	240 ± 30	1000x600x2000
<b>S12</b>	1060	max. 505	1120	370	684	n/a	280	13.5	255 ± 10	230 ± 10	1200x600x2000
<b>L08</b>	max. 680	557	1320	458	320	225	485	13.5	290 ± 10	540 ± 30	800x600x2000
<b>L10</b>	890	max. 557	1320	455	504	n/a	285	13.5	290 ± 10	230 ± 10	1000x600x2000
<b>L12</b>	1060	max. 557	1320	455	674	n/a	285	13.5	290 ± 10	220 ± 10	1200x600x2000

\* General tolerance: ISO 2768-v  
All dimensions (and tolerance) are in mm.

## Inlet Air Flow Required For Cooling

Frame size	Min air volume* [m <sup>3</sup> /h]
<b>S08, L08</b>	1069
<b>S10, L10</b>	1069
<b>S12, L12</b>	1069

## Headquarters, Global Innovation and Development

### Switzerland

#### Schaffner Group

Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

## Sales and Application Centers

### Switzerland

#### Schaffner EMV AG

Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

### China

#### Schaffner EMC Ltd. Shanghai

Building C  
T20-3 C No 565 Chuangye Road Pudong  
district  
C 幢 上海市浦东新区创业路 565 号 T20-3  
201201  
Shanghai  
+ 86 21 38 139 500  
[cschina@schaffner.com](mailto:cschina@schaffner.com)

### Singapore

#### Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1 #05-09 Kampong Ubi  
Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

To find your local partner within  
Schaffner's global network [schaffner.com](http://schaffner.com)

© 2023 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.